



**NETWORK
TECHNOLOGIES
INCORPORATED**


1275 Danner Dr Tel:330-562-7070
Aurora, OH 44202 Fax:330-562-1999
www.networktechinc.com

XTENDEX® Series

ST-C6FOUSBDP4K-LC

4K 10.2Gbps DisplayPort USB KVM Extender via CAT6/7 or Fiber

Product Manual

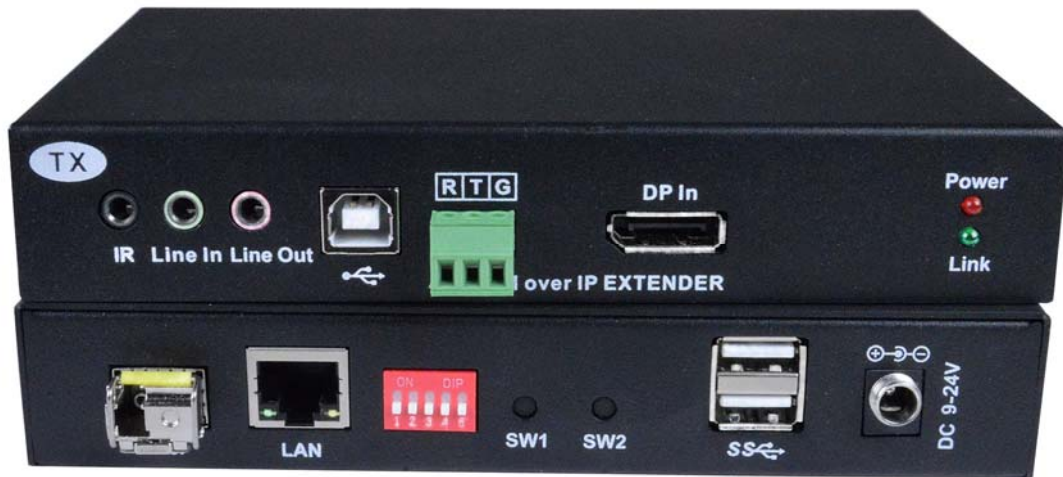

ST-C6FOUSBDP4K-L-LC (Frontview-Top)
ST-C6FOUSBDP4K-R-LC (Rearview-Bottom)

TRADEMARK

XTENDEX and the NTI logo are registered trademarks of Network Technologies Inc in the U.S. and other countries. All other brand names and trademarks or registered trademarks are the property of their respective owners.

COPYRIGHT

Copyright © 2022-2023 by Network Technologies Inc. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written consent of Network Technologies Inc, 1275 Danner Drive, Aurora, Ohio 44202.

CHANGES

The material in this guide is for information only and is subject to change without notice. Network Technologies Inc reserves the right to make changes in the product design without reservation and without notification to its users.

Note: This device not support MST (Multi Stream Transport) hub function based on DP1.2

Introduction

The XTENDEX® 4K 10.2Gbps DisplayPort USB KVM Extender via CAT6/7 or Fiber provides remote KVM (USB keyboard, USB mouse and 3840x2160@30Hz UHD DisplayPort monitor) access to a USB computer up to 328 feet (100 meters) away via CAT6/6a/7 cable, 6.21 miles (10 km) via simplex LC single-mode fiber optic cable, or 1640 feet (500 m) via simplex LC multimode (OM2 and above) fiber optic cable.

Each KVM extender consists of a local unit that connects to a computer, and a remote unit that connects to an DisplayPort monitor, bi-directional 3.5mm stereo audio speakers and microphone, RS232, and up to four USB devices (keyboard, mouse, flash drive, HDD, or touchscreen display).


Features:

- Supports Ultra-HD 4Kx2K resolutions to 3840x2160 @30Hz YUV 4:4:4, HDTV resolutions to 1080p, and up to 1920x1200.
- Signal transmission via one CAT6/6a/7 cable or one single-strand single-mode/multimode LC fiber optic cable.
 - Using CAT6/6a/7 cable:
 - Extend a 4Kx2K signal up to 328 feet (100 meters).
 - Extend a 1080p or 1920x1200 signal up to 492 feet (150 meters).
 - Use with a Gigabit switch to extend a total distance of 656 feet (200 meters) between the transmitter and receiver – the transmitter and receiver can each be extended 328 feet (100 meters) from the switch.
 - Using single-mode 9-micron cable, extend to 6.21 miles (10 km).
 - Using multimode 50-micron cable (OM2 and above), extend to 1640 feet (500 meters).
- DisplayPort features supported:
 - DP 1.2
 - 36-bit Deep Color
 - RGB, YCbCr 4:4:4, YCbCr 4:2:2
 - Dolby, DTS, Stereo, and LPCM
 - Bandwidth up to 340 MHz (10.2Gbps)
 - Does **NOT** support MST.
- HDCP compliant.
- Four USB 2.0 ports for keyboard, mouse, flash drive, HDD or touchscreen display.
 - Keyboard and mouse are hot-pluggable.
- Supports Plug-and-Play specification.
- Using an unmanaged Gigabit network switch, extend up to 32 pairs in Point-to-Point connections.
 - Use the DIP switch on the transmitter and receiver to specify the unique identifier for the unit.
 - Transmitter and receiver units with the same unique identifier will connect to each other. (Only Point-to-Point connections are supported.)
- Supports full-duplex RS232 up to 115200 baud.
- EDID pass-through for the support of any DisplayPort display device.
- Mounting brackets included for easy surface/wall mounting.

Package Includes:



- 1 x Local Unit
- 1 x Remote Unit
- 1 x FO4436 optical transceiver (local and remote)
- 1 x 72.83 in (1,850.00 mm) USB A to B cable
- 1 x Mounting Rack Metal Parts
- 2 x Power supplies (12V/2A)
- 2 x 3-Terminal Block for RS232

Features and Functions

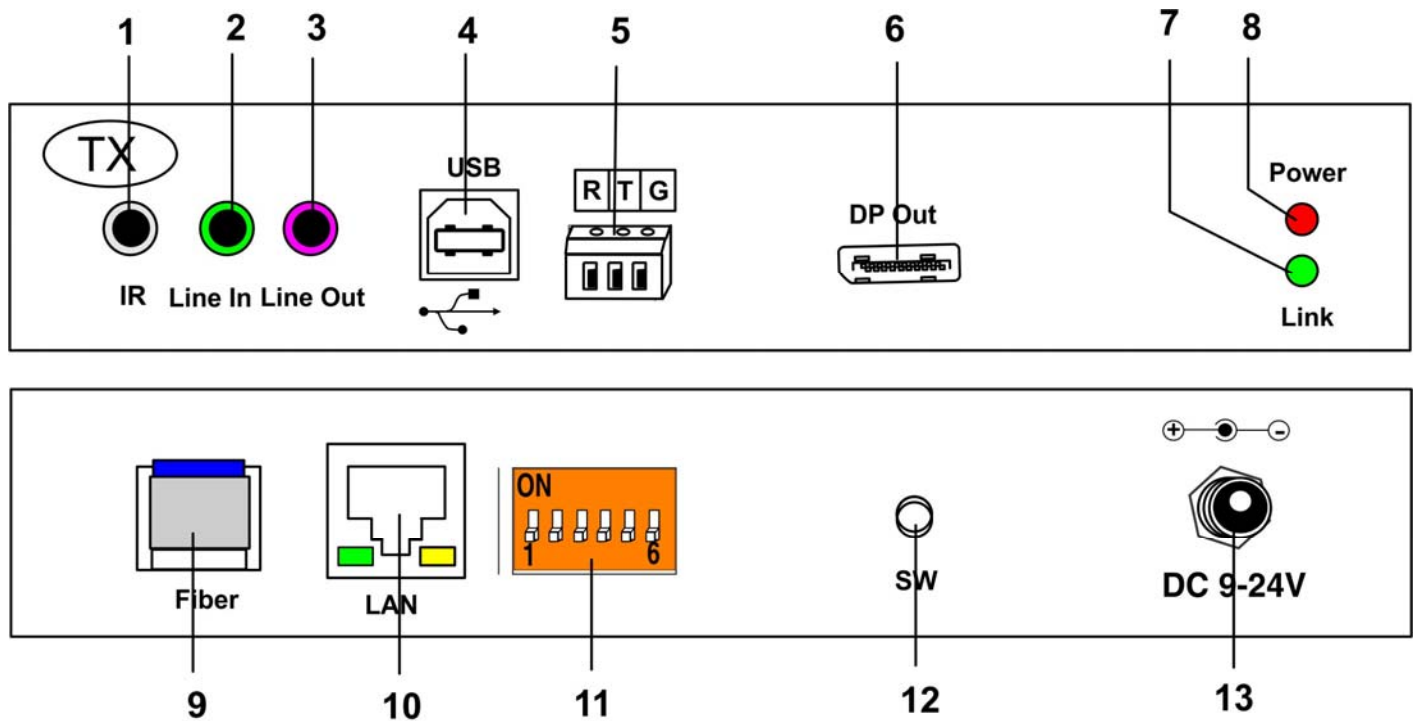

Transmitter (Tx)- Front and Rear Panel

#	LABEL	CONNECTOR/LED	DESCRIPTION
1	IR	3.5mm Jack	Not Used at this time
2	Line In	3.5mm Jack	Audio Input; signal from Line Out of Rx
3	Line Out	3.5mm Jack	Audio Output; signal from Mic In of Rx
4	USB	USB Type B Female	Connect cable to USB port of PC for Hub extension
5	R T G	3-Terminal Block	For RS232 extension: Rxd/Txd/Gnd
6	DP In	DisplayPort Female	DisplayPort Input from video source
7	Link	GREEN LED	LED blinks indicating Ethernet packets are being transmitted
8	Power	RED LED	LED Illuminates solid red when power is applied
9	Fiber	SFP Port	SFP module is attached for Fiber cable connection
10	LAN	RJ45 Female	Attach CATx cable here from Rx
11	----	DIP Switches	Used to establish unique identifier of pair
12	SW	Button	Reserved for future use
13	DC 9-24V	Power Jack	System power supply connection

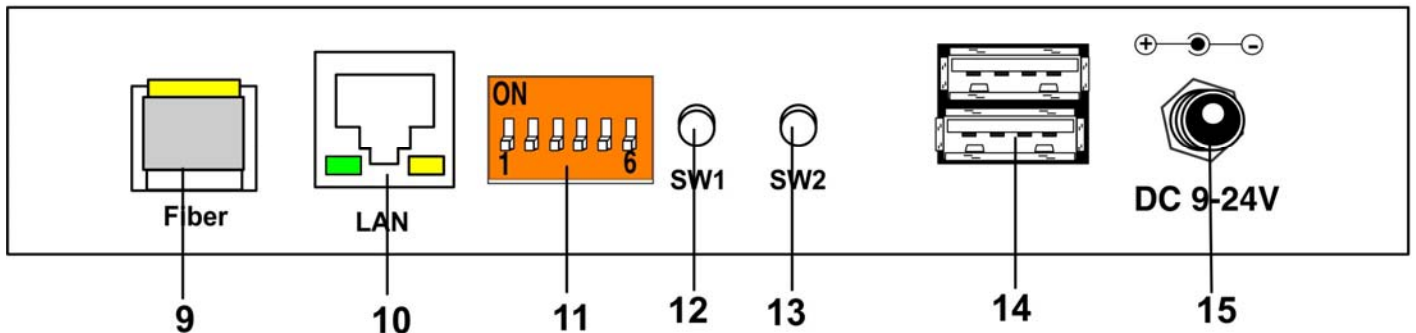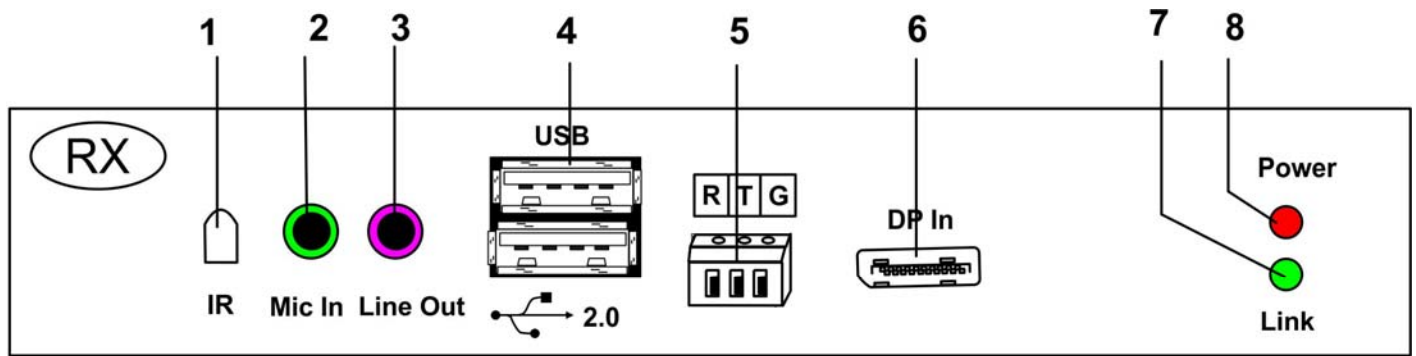

Receiver (Rx)- Front and Rear Panel

#	LABEL	CONNECTOR/LED	DESCRIPTION
1	IR	Sensor	Not Used at this time
2	Mic In	3.5mm Jack	Microphone Input; extended to Line Out of Tx
3	Line Out	3.5mm Jack	Audio Output; extended to Line In of Tx
4	USB	USB Type A Female x2	Connect to USB devices (keyboard, mouse, flashdrive, touchscreen)
5	R T G	3-Terminal Block	For RS232 extension: Rxd/Txd/Gnd
6	DP Out	HDMI Female	DisplayPort out to display; maximum resolution is 3840x2160@30Hz
7	Link	GREEN LED	LED blinks indicating Ethernet packets are being transmitted
8	Power	RED LED	LED Illuminates solid red when power is applied
9	Fiber	SFP Port	SFP module is attached for Fiber cable connection
10	LAN	RJ45 Female	Attach CATx cable here from Tx or network switch
11	----	DIP Switches	Used to establish unique identifier of pair
12	SW1	Button	After pressing SW1, the Uart Baudrate -> Update EDID will show on the top left of the screen in sequence. The OSD menu will disappear after 10 seconds. Note: "Uart Baudrate"= baudrate of the RS232 transmission
13	SW2	Button	As you press SW1 to show the baudrate on the OSD menu, press SW2 to change the baudrate. The font will change to red. Repeatedly press SW2 to cause the Uart baudrate to be shown sequentially 115200 -> 57600 -> 38400 -> 19200 -> 9600 -> 4800 -> 2400 -> 1200. When the desired baudrate is shown, press SW1 to have it take effect and update. The OSD menu will disappear after 10 seconds.
14	None	USB Type A Female x2	Connect to USB devices (keyboard, mouse, flashdrive, touchscreen)
15	DC 9-24V	Power Jack	System power supply connection

System Installation


1. Attach a display, keyboard/mouse, microphone and speaker, as required, to the DP-Out, USB, MIC-IN and Line-Out ports of the Receiver respectively.
2. Use a DisplayPort-to-DisplayPort cable to attach the computer DisplayPort output to the DP-IN of the Transmitter.
3. Use a USB-B male to USB-A male cable to connect Transmitter USB-B to the computer USB-A port.
4. Connect the Transmitter's Line-In/Line-Out to the computer Line-Out/Line-In using audio cables.
5. 5.1 For CATx cable installation: Use a CAT6/6a/7 UTP cable (straight EIA 568B, max. 150 meters depending on cable quality) to directly connect the Tx to the Rx as a paired connection, or 100 meters (each) to a Gigabit Ethernet Switch.
5.2 For Fiber cable installation: Connect fiber cable (either Single-Mode (up to 10km) or Multi-Mode (up to 500m) to the pre-attached 1.25G SFP module of the Tx/Rx SFP Fiber Slot for direct Tx/Rx connection, or connect to a Gigabit Ethernet Switch.
6. Adjust the Tx/Rx 5-bit DIP Switch to match as a paired connection.
7. Power ON both the Receiver and the Transmitter.
8. The EDID of Rx screen will be detected by the computer Graphic card. The computer DisplayPort/Audio outputs will be displayed/heard on the Receiver's monitor and speakers. The EDID info should be available on the computer graphic control panel.
9. The USB keyboard/mouse at the Receiver will now control the computer at the Transmitter.

When multiple Transmitters and Receivers are connected to a network switch, each pair must have a separate unique identifier number, determined by the position of the dipswitches on the front of the Transmitter and Receiver. A Transmitter and Receiver can only connect to each other (pair) if their unique identifier numbers are the same, and they must not be the same as any other unique identifier numbers on other Transmitters and Receivers connected to the network switch. That is, each pair of Transmitter and Receiver must have a unique identifier number that match each other.


If multiple Transmitters have the same unique identifier, the Receiver with the unique identifier will show no video. If multiple Receivers have the same unique identifier, the Transmitter will send no video to any of those Receivers so they will show no video.



ID 00000

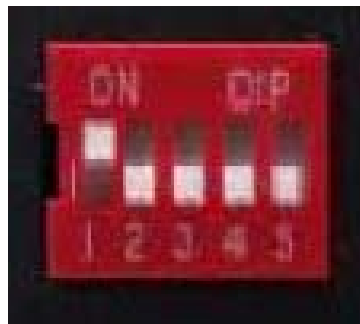

ID 10000

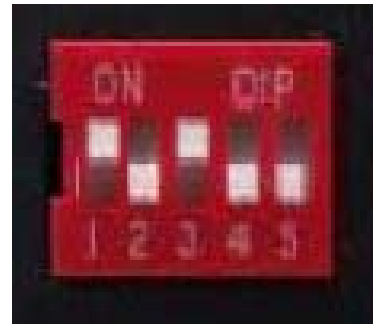

ID 10100

Specifications

Transmitter (Local Unit)	
Host	USB Computer with DisplayPort output
Operating System	Multiplatform support: Windows 7/8/10/11, Windows Server 2008/2012/2016/2019/2022, Linux and MAC OS 10/11
Video Connector	Female DisplayPort
USB Connector	Female USB Type B
Audio Connectors	2x Female 3.5mm jacks for Audio Out and Mic In
RS232 Connector	3-pin screw terminal block; supports full duplex RS232 up to 115200 baud
CATx connector	Female RJ45 for sending/receiving video, audio, USB and RS232 signals
Fiber connector	One simplex female LC fiber optic port for sending/receiving video, audio, USB and RS232 signals
Identification	DIP switch for specifying Unit unique identifier number
HDMI Compliance	Supports DP 1.2 Note: This device not support MST (Multi Stream Transport) hub function based on DP1.2
HDCP Compliance	Supports HDCP
Receiver (Remote Unit)	
Video Connector	Female DisplayPort
USB Connector	4x Female USB 2.0 Type A
Audio Connectors	2x Female 3.5mm jacks for Audio Out and Mic In
RS232 Connector	3-pin screw terminal block; supports full duplex RS232 up to 115200 baud
CATx connector	Female RJ45 for sending/receiving video, audio, USB and RS232 signals
Fiber connector	One simplex female LC fiber optic port for sending/receiving video, audio, USB and RS232 signals
Identification	DIP switch for specifying Unit unique identifier number
Supported Video Resolutions	<ul style="list-style-type: none"> • Ultra-HD 4Kx2K resolutions to 3840x2160@30Hz YUV 4:4:4 • HDTV resolutions to 1080p • Up to 1920x1200
Audio Support	Supports embedded digital audio through HDMI compatible TVs or audio receivers.
General	
Power (Local and Remote Units)	Input: 100 to 240 VAC at 50 or 60 Hz via AC adapter (included). Output: 12VDC, 2A
Dimensions WxDxH (in.)	6.30x4.29x1.12 (160x109x28.50mm)
Operating Temperature	32 to 131°F (0 to 55°C).
Storage Temperature	-4 to 185°F (-20 to 85°C).
Operating/storage relative humidity	5 to 90% non-condensing RH.
Regulatory Approvals	CE, FCC, RoHS
Maximum Distance With CAT6/6a/7 cable	<ul style="list-style-type: none"> • Extend a 4Kx2K signal up to 328 feet (100 meters). • Extend a 1080p or 1920x1200 signal up to 492 feet (150 meters).
Maximum Distance With Fiber optic cable	<ul style="list-style-type: none"> • Using single-mode 9-micron cable, extend to 6.21 miles (10 km). • Using multimode 50-micron cable (OM2 and above), extend to 1640 feet (500 meters).

Warranty Information

The warranty period on this product (parts and labor) is two (2) years from the date of purchase. Please contact Network Technologies Inc at **(800) 742-8324** (800-RGB-TECH) or **(330) 562-7070** or visit our website at <http://www.networktechinc.com> for information regarding repairs and/or returns. A return authorization number is required for all repairs/returns.

MAN418 Rev. 6/20/23