

DVI/HDMI USB KVM SPLITTER

VOPEX®


Allows up to four users to control one DVI/HDMI USB computer and three USB Devices

- Compatible with USB computers (PC, SUN, MAC)
- Built-in hub for multiple USB devices.
- Access one computer from multiple locations.
- Multiple users can enter data into the same program.
- Supports HDTV resolutions to 1080i, and up to 1920x1200 (WUXGA).
- Compliant with USB 2.0 (low/full speed) standards.
- Compliant with HDMI 1.2, HDCP 1.1 and DVI 1.0 standards.
- Supports Plug-n-Play specifications.
- High quality, rugged steel construction with durable, powder-coat finish.



VOPEX-USBH-2 (Front & Back)

The VOPEX® HDMI/DVI USB KVM splitter with built-in USB hub allows up to four users (four USB keyboards, USB mice and DVI/HDMI monitors) to access one USB computer and up to three USB devices (printers, scanners, security cameras, etc.).

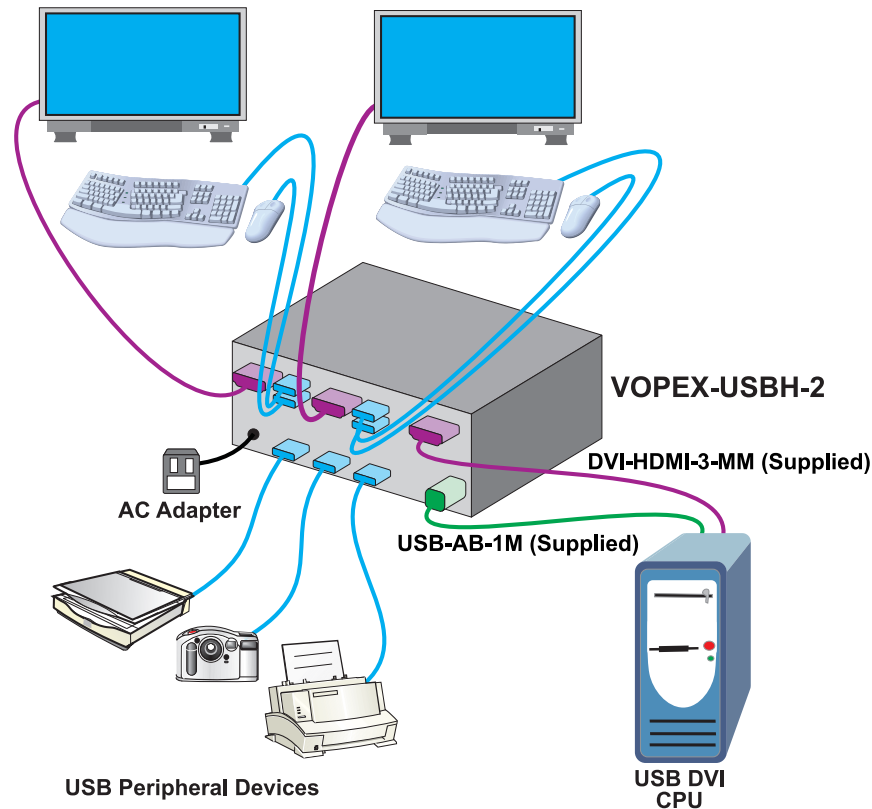

Allows up to four users to control one DVI/HDMI USB computer and three USB Devices

Specifications

Host Connection

- Female HDMI-A connector.
- Female USB Type B connector.
- Supports a USB computer (PC, SUN, MAC) with HDMI/DVI video.
- Multiplatform support: Windows 7/8/10/11, Windows Server 2008/2012/2016/2019/2022, Solaris, Linux, FreeBSD, and MAC OS 10/11/12.

Monitor

- Female HDMI-A connectors.
- Supports HDTV resolutions to 1080i, and up to 1920x1200 (WUXGA).
- Compliant with HDMI 1.2, HDCP 1.1 and DVI 1.0 standards.

Devices

- Female USB Type A connectors for connection of keyboard, mouse.
 - Compatible with most USB keyboards and mice, including Microsoft USB Intellimouse®, Logitech Cordless Elite Duo keyboard/mouse, Logitech MK345/MK735 wireless keyboard/mouse, Gyration keyboard/mouse and Crystal Vision keyboard with touchpad.
 - Keyboard and mouse are hot-pluggable.
 - Supports international keyboard layouts in auto-detection mode.
- Three female USB Type A connectors for connection of USB peripheral devices (printers, scanners, security cameras, etc.)
 - Does not support USB touchscreen monitors.
- Provides support for full-speed (12 Mbps) or low-speed (1.5 Mbps) USB devices.

Power

- 100 to 240 VAC at 50 or 60 Hz via AC adapter. (Country specific AC adapter included.)

MTBF

- VOPEX-USBH-2: 200,241 hours

Dimensions

- WxDxH (in): 8.5x6.0x2.6

Environmental

- Operating temperature: 32 to 100°F (0 to 38°C).
- Storage temperature: -22 to 140°F (-30 to 60°C).
- Operating/storage relative humidity: 17 to 90% non-condensing RH.

Regulatory Approvals

- CE, RoHS
- TAA compliant

Warranty

- Two years

DVI/HDMI USB KVM Splitter Models

Supported Features	NTI Part #	# of Ports
USB KVM	VOPEX-USBH-2	2
USB KVM	VOPEX-USBH-4	4

Control Modes

- Press **Mode** button to cycle through all four modes. LEDs indicate which mode is selected.
- **User 1 Mode**—only User 1 can type or move mouse.
- **User 2 Mode**—only User 2 can type or move mouse.
- **User 3 Mode**—only User 3 can type or move mouse.
- **User 4 Mode**—only User 4 can type or move mouse.
- **Inst Mode**—keyboard or mouse activates immediately
- **Delay Mode**—locked out user must wait five seconds after last keystroke or mouse movement occurs on active user.

Cables

- Use the included three-foot DVI-D male to HDMI-A male single link cable to connect a DVI-D source or display.
- Use HDMI-xx-MM cable to connect an HDMI source or display (not included).
- One-meter male USB Type A to male USB Type B cable included.