



INSTALLATION GUIDE FOR THE E-AV-LC-7

INTRODUCTION

The NTI ENVIROMUX® E-AV-LC-7 Air Velocity Sensor monitors air flow rate when connected to an E-16D, E-5D or E-2D Enterprise Environment Monitoring System (SYSTEM). When connected to a SYSTEM via the 7 foot cable provided, the air flow rate can be monitored and the SYSTEM can be configured to alert users as to variations in that movement.


Features:

- Reliable sensor for measurement of air velocity.
- Flow range: 0-82 ft/s (0-25 m/s).
- Accuracy: ± 1.6 ft/s (± 0.5 m/s) from 0 to 49 ft/s @21°C (0 to 15 m/s).
- Includes mounting hardware.
- Operating temperature: 32 to 158°F (0 to 70°C).
- Probe dimensions: 6.3x0.6 inches (160x15 mm).
- Probe material: PA 2200.
- Cable length of 7 feet, but can be extended to 1000 feet (use NTI# RJ45-FF - included)
- Powered by E-2D/5D/16D.
- Compatible with E-2D/5D/16D.
 - E-2D: only compatible with Rev C units (features two power inputs).
- Regulatory approvals: CE, RoHS.
- Compatible with E-FSC Fiber Converter/Extender.
 - Use to extend sensor up to 1.2 miles (2 km) from the ENVIROMUX unit.

Note: The E-xD must be running firmware version 2.10 or later in order to use the E-AV-LC-7 with it. Refer to the E-xD manual for firmware upgrade instructions as needed.

INSTALLATION

E-AV-LC-7 can be mounted using the mounting adapter provided. When mounting the adapter, be sure to align the mounting screws in line with the air flow. The key should be positioned towards the source of the airflow.

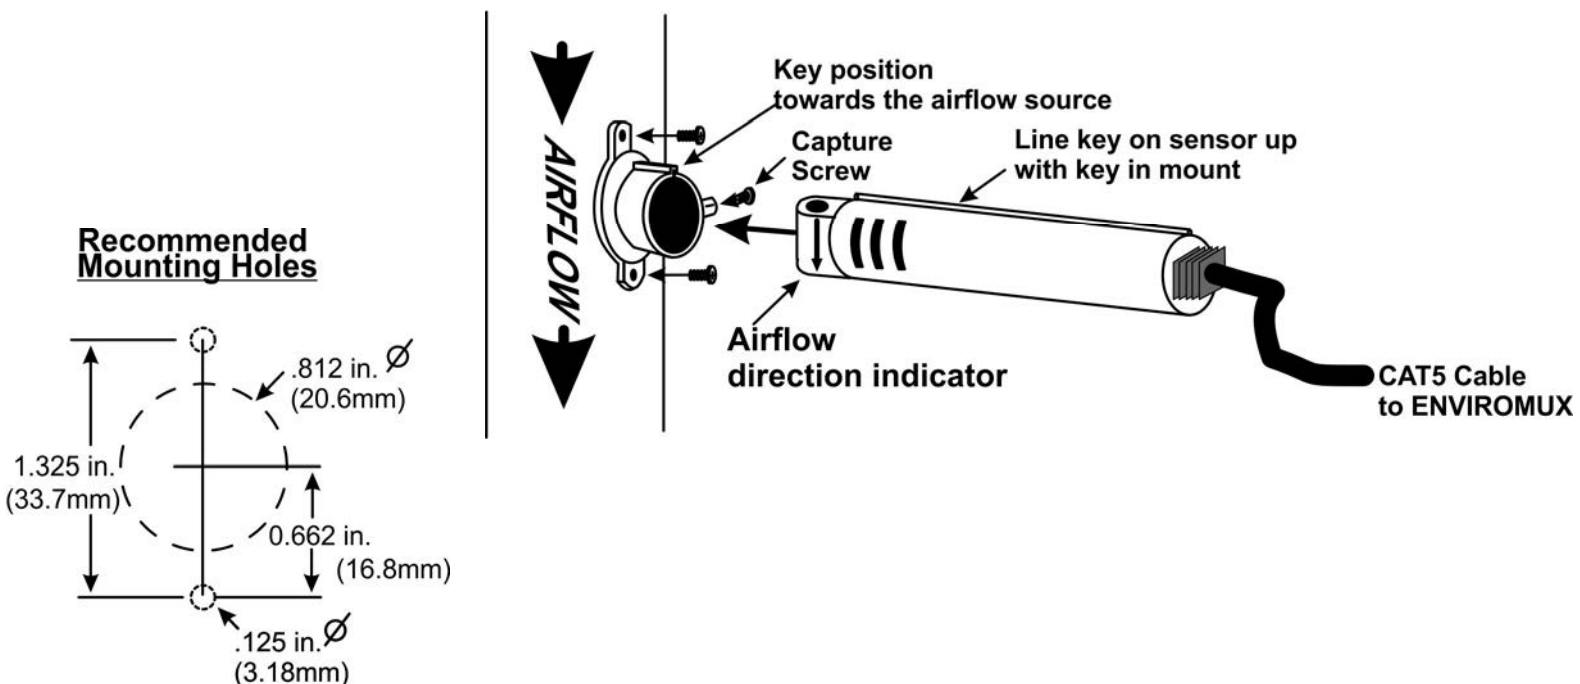

VIEW OF SENSOR STATUS PAGE

Sensor #2.1 Configuration (Type: Air Velocity)

<input type="checkbox"/> Sensor Settings	
Description	<input type="text" value="Sensor #2.1"/> Descriptive name for the sensor
Min. Level	<input type="text" value="0.0"/> Min. supported value for the sensor
Max. Level	<input type="text" value="30.0"/> Max. supported value for the sensor
Min. Non-Critical Threshold	<input type="text" value="0.0"/> Min. threshold below which indicates a non-critical alert condition
Max. Non-Critical Threshold	<input type="text" value="25.0"/> Max. threshold above which indicates a non-critical alert condition
Min. Critical Threshold	<input type="text" value="0.0"/> Min. threshold below which indicates an alert condition
Max. Critical Threshold	<input type="text" value="25.0"/> Max. threshold above which indicates an alert condition
Refresh Rate	<input type="text" value="10"/> <input type="text" value="Sec"/> <input type="button" value="v"/> The refresh rate at which the sensor view is updated
<input type="checkbox"/> Group Settings	
<input type="checkbox"/> Schedule Settings	
<input type="checkbox"/> Non-Critical Alert Settings	
<input type="checkbox"/> Critical Alert Settings	
<input type="checkbox"/> Data Logging	
<input type="button" value="Save"/>	
Alert Simulation	
<input type="button" value="Simulate Alert"/> <input type="button" value="Clear Alert"/>	

EXAMPLE OF SENSOR CONFIGURATION PAGE

TECHNICAL SPECIFICATIONS

Description	Specification
Measurement Medium	air velocity
Flow Range	0-82 ft/s (0-25 m/s).
Connector	RJ45 Male
Cable Length	7 feet (+ coupler to extend up to 1000 feet)
Accuracy	±1.6 ft/s (±0.5 m/s) from 0 to 49 ft/s (0 to 15 m/s) @21°C
Operating temperature	32 to 158°F (0 to 70°C)
Power	5VDC and 12VDC from the SYSTEM
Current consumption	5V @ 15mA and 12V @ 60mA
Compatible with	E-2D / -5D / -16D
Powered by	E-2D (REV C only) / -5D / -16D
Probe dimensions	6.3x0.6 inches (160x15 mm)
Probe material	PA 2200 Plastic
Certifications	CE certified, RoHS compliant

WARNING: To avoid damaging the E-AV-LC-7 Air Velocity Sensor, it should only be operated where it will sense at least some air flow (≥ 8.2 ft/s (2.5 m/s)) daily.

TRADEMARK

ENVIROMUX and the NTI logo are registered trademarks of Network Technologies Inc in the U.S. and other countries. All other brand names and trademarks or registered trademarks are the property of their respective owners.

COPYRIGHT

Copyright © 2009, 2021 Network Technologies Inc. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written consent of Network Technologies Inc, 1275 Danner Drive, Aurora, OH 44202.

CHANGES

The material in this guide is for information only and is subject to change without notice. Network Technologies Inc reserves the right to make changes in the product design without reservation and without notification to its users.

WARRANTY INFORMATION

The warranty period on this product (parts and labor) is two (2) years from date of purchase. Please contact Network Technologies Inc at (800) 742-8324 or 330-562-7070 for information regarding repairs and/or returns. A return authorization number is required for all repairs/returns.

MAN214 Revised 7/28/2021